



SECTION 3.1

LINEAR WET-DEC

PRODUCT
SPECIFICATION
GUIDE

3.1 LINEAR WET-DEC

FINISHED PRODUCT



The Linear Wet-Dec pre-formed shower base has been developed specifically to allow the installation of a wetroom on a timber floor.


Available in a range of sizes, the dec has a built-in gradient ensuring that water from the shower is directed towards the integral linear drain, giving a sleek and stylish finish.

The key feature of the Linear Wet-Dec is its two way fall which allows the tiling to be laid without diagonal cuts, therefore making it ideal for use with large format tiles.

The integrated linear drain is available with one, two or three traps and a choice of stylish grill finishes.

KEY FEATURES

- Designed for timber floors
- Two way fall - suited to large format tiles
- 7 pre-formed sizes
- Trimmable
- Lifetime Guarantee
- Stylish linear drain
- Variable waste position
- Flow rate up to 68 L/min
- Height adjustable grill
- Bespoke design available

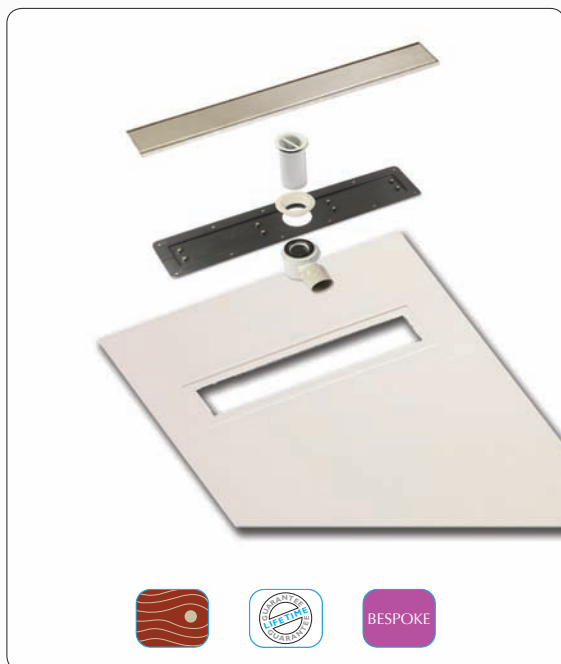

3.1 LINEAR WET-DEC

DEC


The Linear Wet-Dec is manufactured from sustainable waterproof birch ply making it easy to install whilst ensuring a consistent two way gradient every time.

The clever design allows for far higher flow rates than a more traditional four-way fall dec and making it ideal for the installation of large format tiles.

Each Linear Wet-Dec is supplied with a stainless steel trim for detailing the difference in tile heights where the dec meets the remainder of the bathroom floor - see image for details.


In addition to our range of stock sizes we are also able to offer a bespoke design service, please contact our technical team to discuss your requirements

WET-DEC AND STAINLESS STEEL TRIM

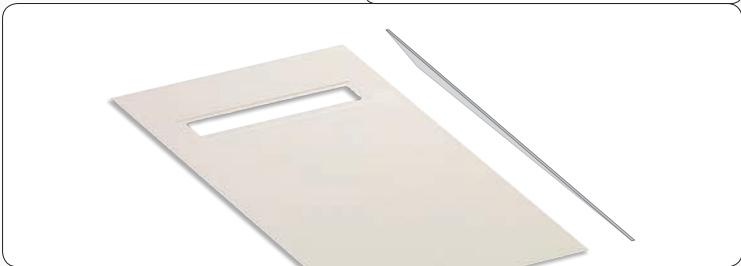

- Designed for timber floors
- Two way fall - suited to large format tiles
- Easily trimmed and drilled
- Lifetime guarantee
- Sustainably sourced (FSC Mixed Credit: TT-C-C-001063)
- Conforms to BS5286 Part 2 (2002)
- Bespoke design available
- 22mm Depth

STAINLESS STEEL TRIM

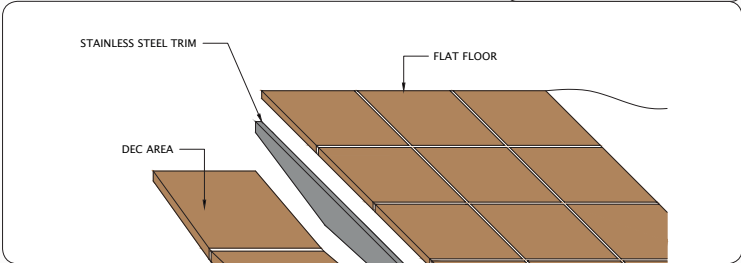


DEC SIZES

The Linear Wet-Dec is available in 7 standard sizes:

A B

- 900mm x 900mm - End drain
- 1200mm x 900mm - Centre drain
- 1200mm x 900mm - End drain
- 1500mm x 900mm - End drain
- 1800mm x 900mm - End drain
- 1800mm x 900mm - Centre drain
- 1000mm x 1000mm - End drain



3.1 LINEAR WET-DEC

TRAP

The trap has an adjustable ball joint and comes with removable dip-tube.

For ease of installation, it can be fitted anywhere within the central section of the trough, making it simple to avoid joists and other such obstructions.



- Multi-directional outlet
- Variable position
- 50mm Water seal
- 50mm Outlet, supplied with 50mm-42mm reducer
- BS1455/1566
- Easy to maintain

NO. OF TRAPS

A single trapped Linear Wet-Dec has a flow rate of up to 27 L/min*. The trap can be fitted anywhere within the trough.

When a higher flow rate is required a double trap version is available, allowing up to 50 L/min*.

For higher flow rates a triple trapped drain is also available.

* See flow rate chart for full details.

ONE TRAP



TWO TRAPS



THREE TRAPS



FLOW RATES

No. of traps	No. of wastes		
	1	2	3
1	25 L/min	n/a	n/a
2	41 L/min	41 L/min	n/a
3	41 L/min	41 L/min	60 L/min
1	27 L/min	n/a	n/a
2	50 L/min	50 L/min	n/a
3	50 L/min	61 L/min	68 L/min

	Solid Grill
	Slotted / Square Holes

3.1 LINEAR WET-DEC

GRILL FINISH

The grill is available in various different finishes.

All are manufactured in 316 marine grade stainless steel, ensuring a stunning high quality finish.

Grill length 600mm

Type A Solid Grill is supplied as standard unless otherwise specified.

Type A - Solid Grill:

Grained stainless steel with a 3mm gap around the grill for a sleek stylish finish.

Type B - Oblong Slots:

Three rows of oblong slots in a highly polished mirrored stainless steel finish.

Type C - Square Holes:

Three rows of squares in a grained stainless steel finish.


TYPE A



TYPE B



TYPE C

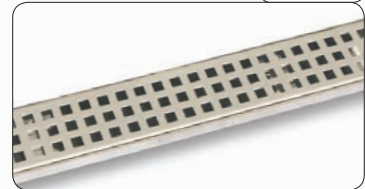


HEIGHT ADJUSTMENT

The grill is height adjustable in 1mm increments to suit tile thicknesses of 6mm to 20mm.

Additional spacers are available upon request for tiles thicker than 20mm.

ADJUSTMENT

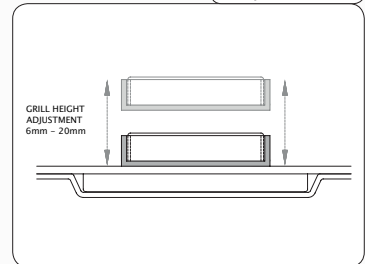

HOW TO SPECIFY

To specify your Linear Wet-Dec, first select the required number of traps (depending on the required flow rate), followed by the grill length and finally the grill finish.

Example: A single trap, 1800mm x 900mm, Linear Wet-Dec with solid grill would have the code: **LWD 105/Type A**

Membrane

It is essential that the floor is waterproofed or 'tanked' using one of the membranes in the 'product details' on page 5.

For timber floors we would recommend the Tilesafe membrane is applied to the entire wetroom floor.

FWM should then be applied to the walls of the shower area plus an additional 300mm and overlapped onto the Tilesafe Reinforcing Tape.

3.1 LINEAR WET-DEC

PRODUCT DETAILS


IMAGE	DESCRIPTION	DEC SIZE	DRAIN POSITION	PRODUCT REF
	Single trap Linear	900mm x 900mm	End	LWD 101
	Wet-Dec, supplied	1200mm x 900mm	Centre	LWD 102
	with solid grill as	1200mm x 900mm	End	LWD 103
	standard ¹	1500mm x 900mm	End	LWD 104
	Maximum flow rate	1800mm x 900mm	End	LWD 105
	27 L/min	1800mm x 900mm	Centre	LWD 106
		1000mm x 1000mm	End	LWD 107
	Double trap Linear	900mm x 900mm	End	LWD 201
	Wet-Dec, supplied	1200mm x 900mm	Centre	LWD 202
	with solid grill as	1200mm x 900mm	End	LWD 203
	standard ¹	1500mm x 900mm	End	LWD 204
	Maximum flow rate	1800mm x 900mm	End	LWD 205
	50 L/min	1800mm x 900mm	Centre	LWD 206
		1000mm x 1000mm	End	LWD 207
	Triple trap Linear	900mm x 900mm	End	LWD 301
	Wet-Dec, supplied	1200mm x 900mm	Centre	LWD 302
	with solid grill as	1200mm x 900mm	End	LWD 303
	standard ¹	1500mm x 900mm	End	LWD 304
	Maximum flow rate	1800mm x 900mm	End	LWD 305
	68 L/min	1800mm x 900mm	Centre	LWD 306
		1000mm x 1000mm	End	LWD 307
¹ Type A – Solid Grill is supplied as standard. For alternative grill finishes please see page 4.				
	RIW Tilesafe – A superior waterproof membrane designed for use in wetrooms, prior to the application of ceramic tiles and natural stone ² .		5m ²	TSK-5
			10m ²	TSK-10
			• Self-adhesive • Quick and easy to install • Lifetime Guarantee • De-coupling properties	
	RIW FWM – A liquid membrane designed for waterproofing walls, fully compatible with Tilesafe and Screedsafe ² .		8kg	FWM-8

² For full technical details please refer to Section 4


3.1 LINEAR WET-DEC

IN DETAIL

FLOOR BUILD UP

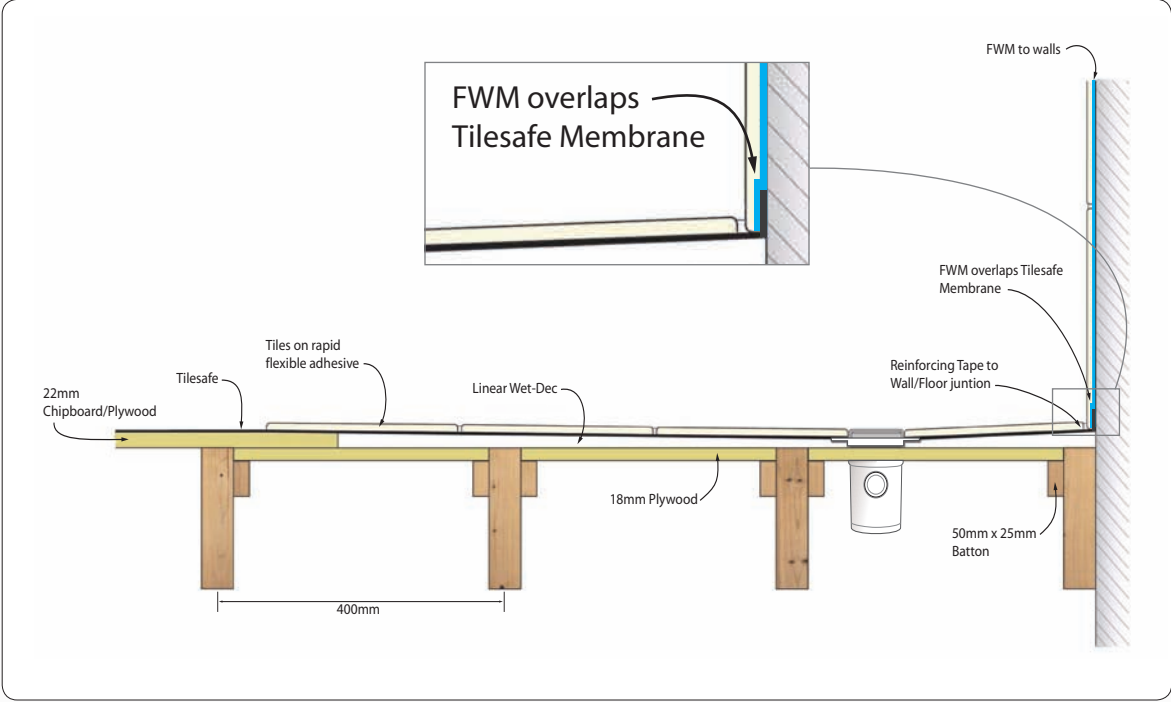


TRAP

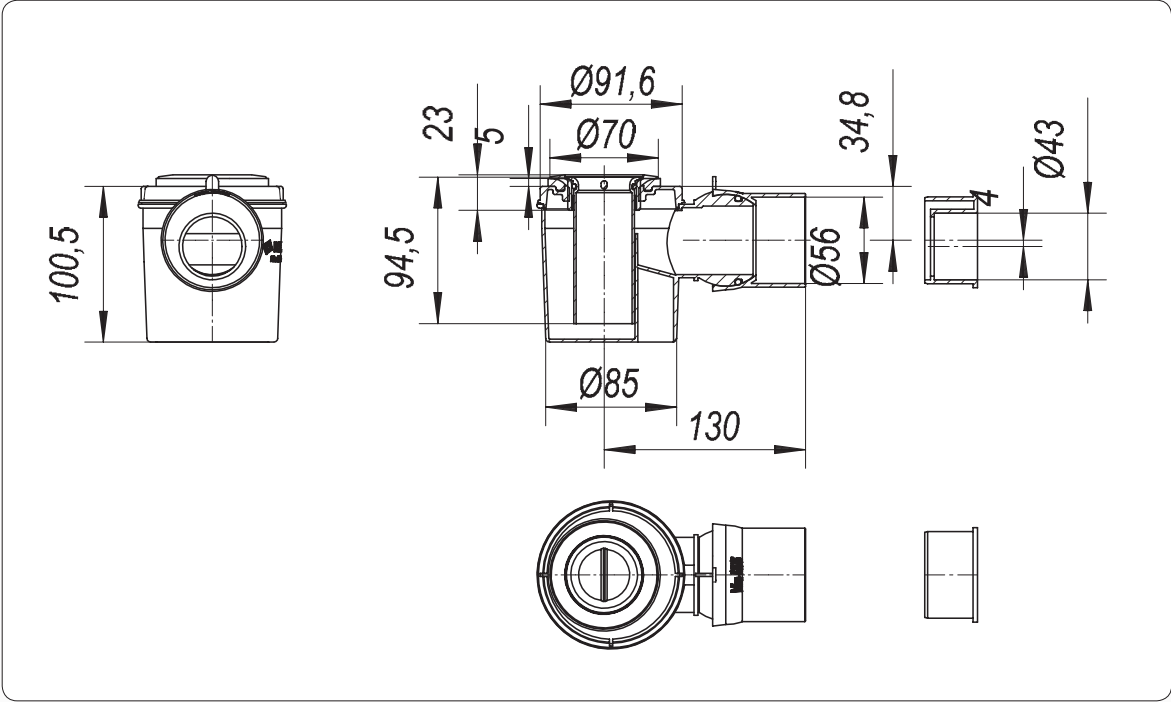


3.1 LINEAR WET-DEC

TROUGH

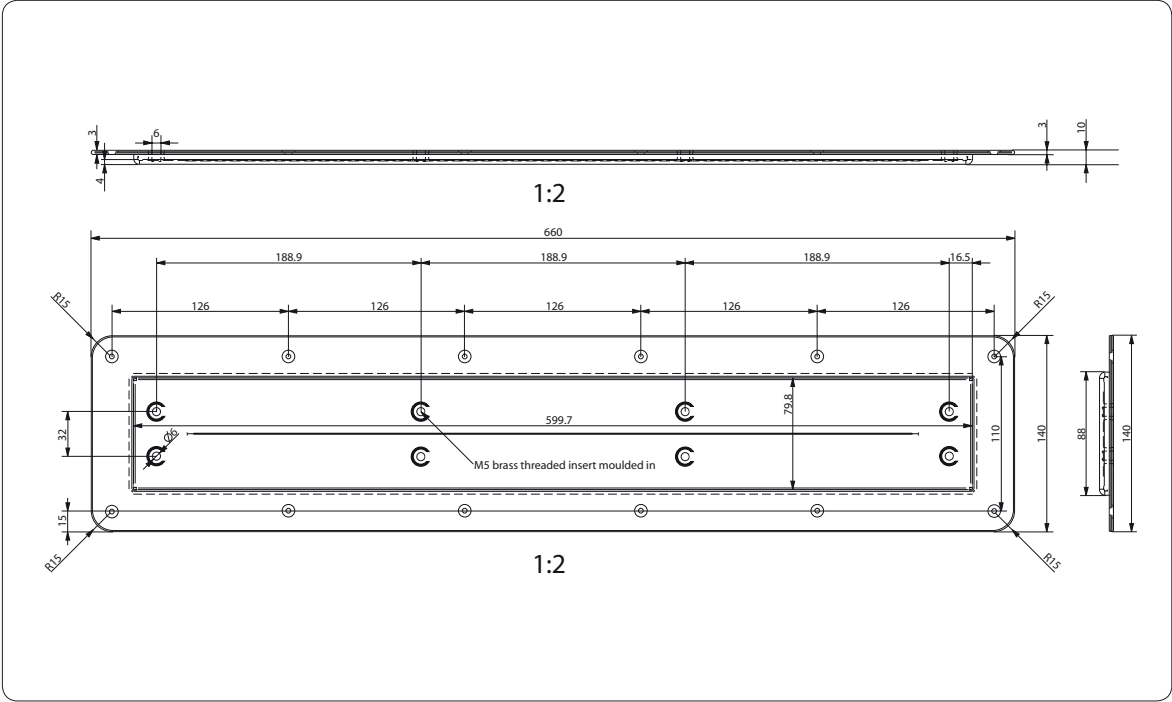


LWD101

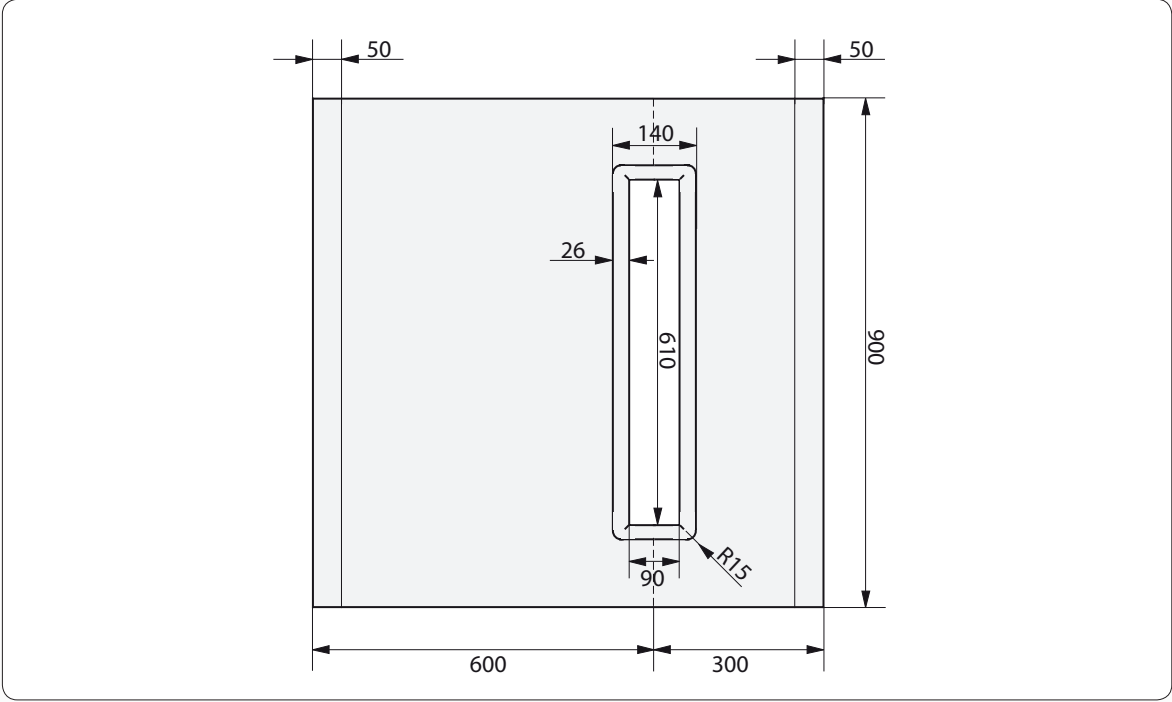


3.1 LINEAR WET-DEC

LWDI02

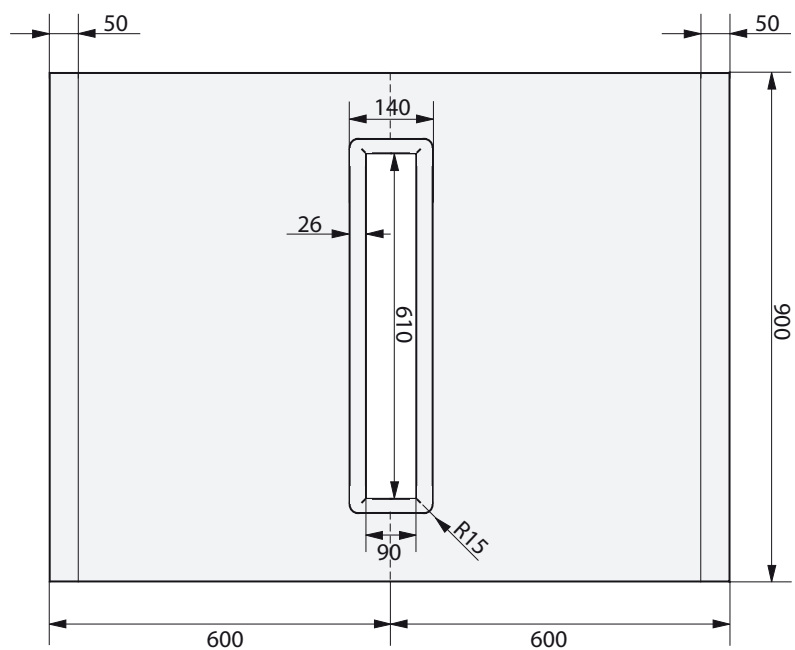


LWDI03

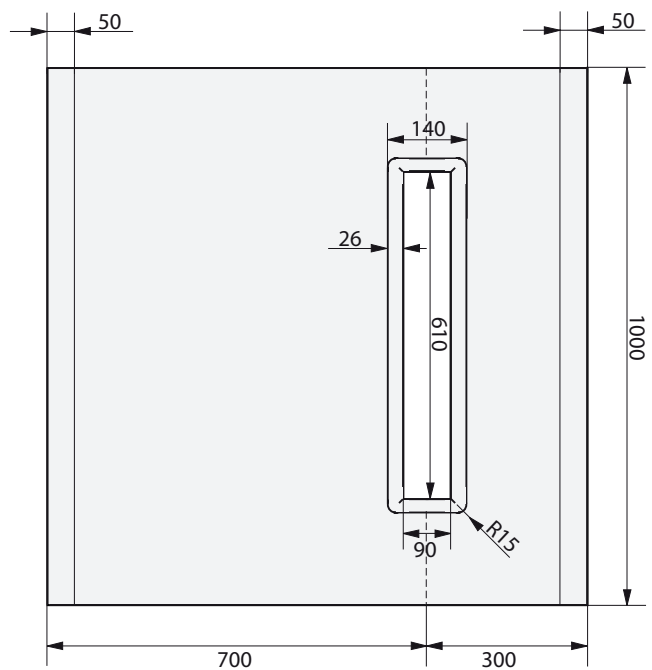


3.1 LINEAR WET-DEC

LWD104

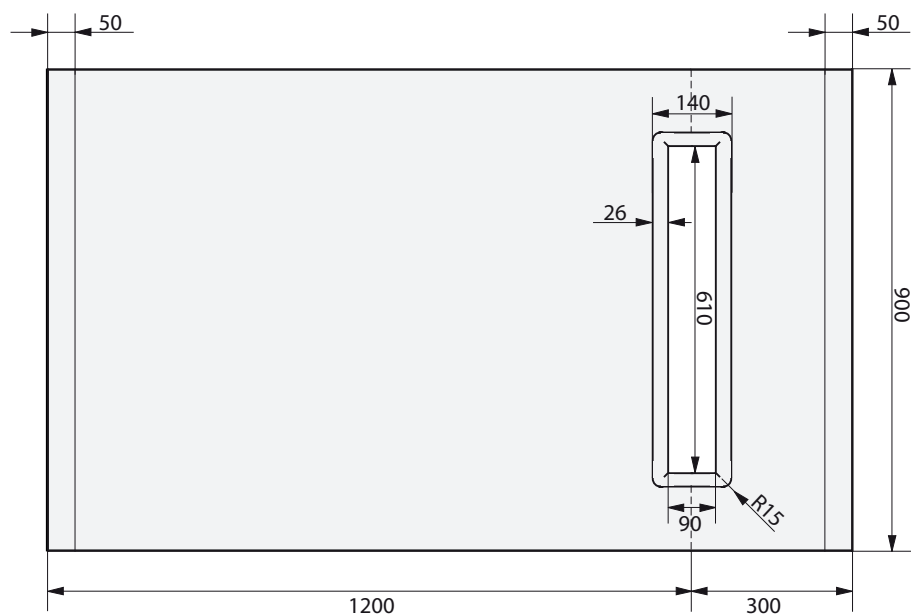


LWD105

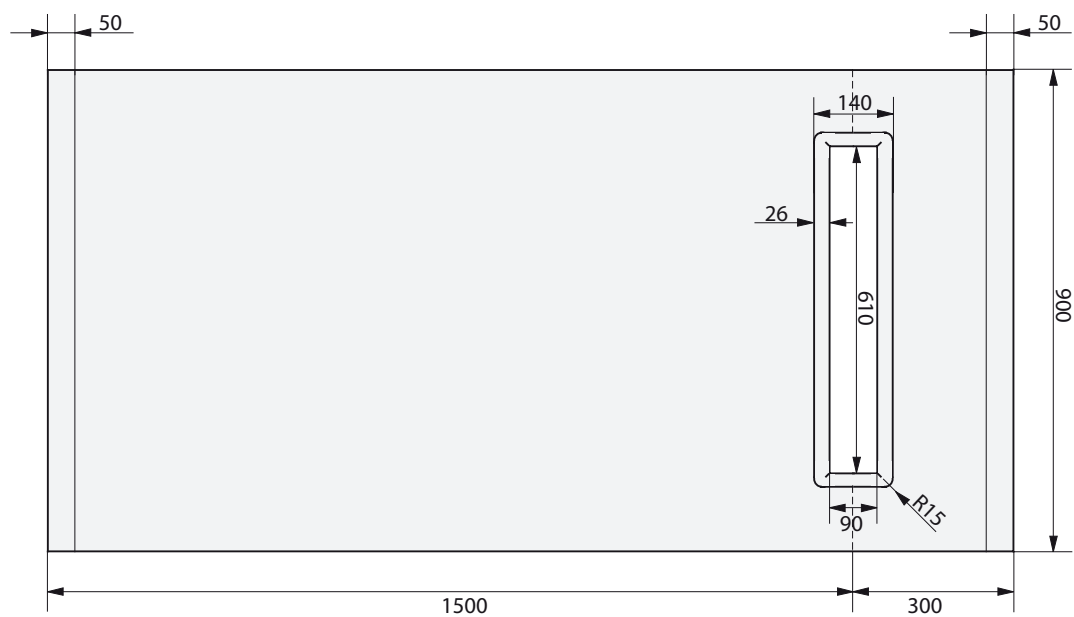


3.1 LINEAR WET-DEC

LWDI06

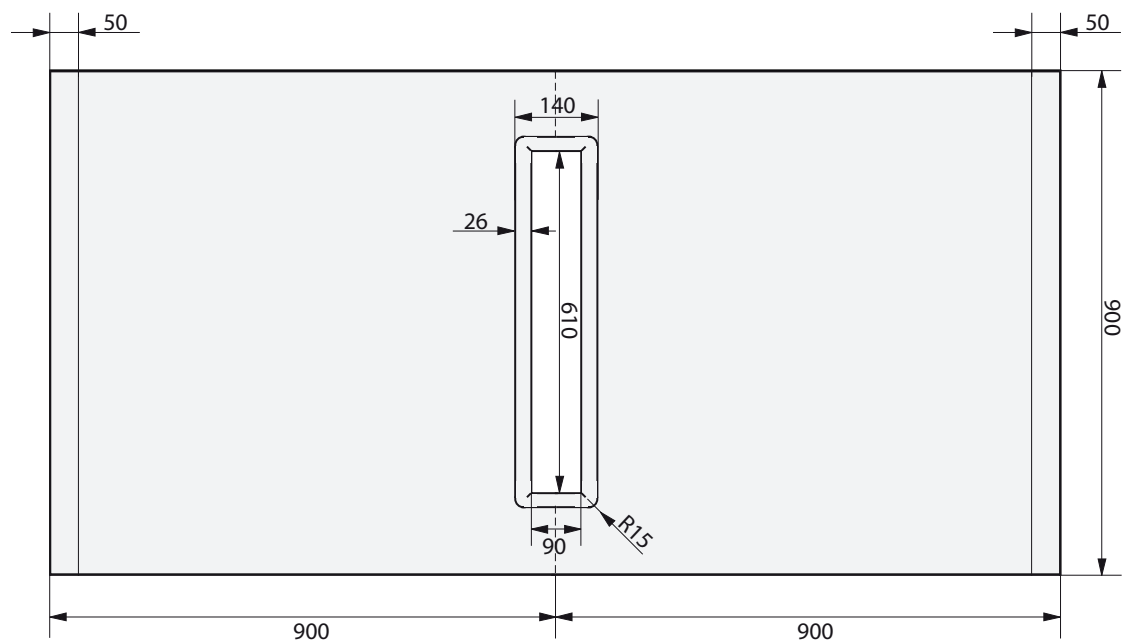

LWDI07

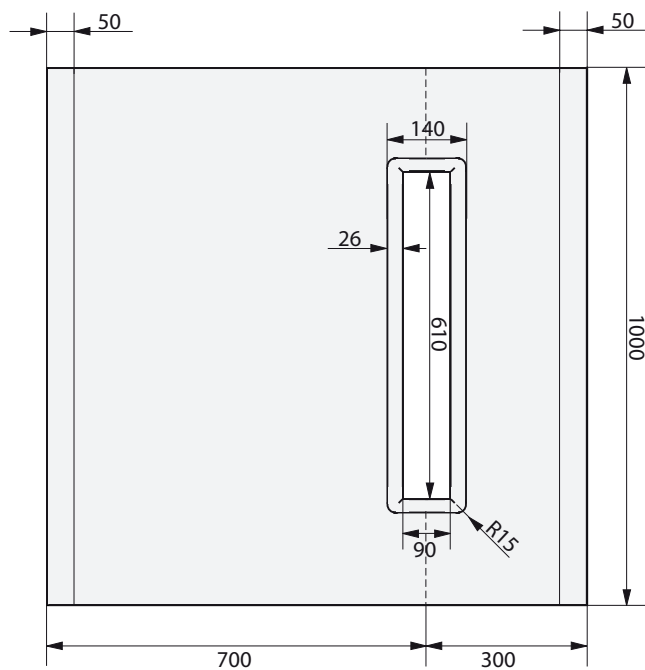

TECHNICAL SUPPORT

For technical assistance please contact our experienced technical department who will be happy to assist in the following;

- Project design
- Product specification
- CAD drawings
- Method statements

TECHNICAL SEMINARS

We are able to provide CPD based seminars designed to provide guidance on key wetroom design considerations such as;

- Design and layout
- Drainage
- Waterproofing
- Flow rates

For further information please contact our technical department.

TECHNICAL ADVICE

Our team of technical advisors are able to visit you to provide a professional advisory service and assist with project design and specification.

We are also able to attend site to provide technical support and assistance.

TECHNICAL ENQUIRIES TEL: 0844 327 6002

Fax: 01256 765100
technical@ccl-wetrooms.co.uk
www.ccl-wetrooms.co.uk

CCL Specialist Supplies Ltd

Highview Business Park
The Barracks, Hook,
Hampshire, RG27 9NL



INSTALLATION

With over 30 years experience in the waterproofing industry, our involvement in a project from conception to completion ensures that quality is never compromised.

Our services include;

- Design and installation
- 10 Year Insured Installation guarantee
- On-site training

INSTALLATION ENQUIRIES TEL: 0845 045 6001

Fax: 01256 765100
enquiries@wetroomsuk.co.uk
www.wetroomsuk.co.uk

Wetrooms UK Ltd

Highview Business Park
The Barracks, Hook,
Hampshire, RG27 9NL

